

HPSA 1000 Pressure Transducer**General description**

Pressure transducer model HPSA 1000 is a SMT pressure sensing device with close bridge configuration for mounting on PCB board or other substrate.

High performance and accuracy enables use of this transducer in many applications, and with its compact and handy design is very suitable for users. This transducer is suitable for any type of application with dry air or non-corrosive gases.


The model HPSA 1000 family consists of pressure ranges from 50 mbar up to 7 bar.

Features

- Low cost
- Easy to use package – SMD (surface mount device)
- Compact and light weight
- High sensitivity
- High-performance, stable silicon chip and package
- Industrial temperature operating range (-25 to 85°C)
- Gage and absolute configurations

Applications

- Medical instrumentation
- Respirators
- Air flow monitoring
- Process control
- Leak detection
- Pneumatic controls
- Altimeters



This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Hyb d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing. Copyright © Hyb d.o.o., 2010. All rights reserved.

HPSA 1000 Pressure Transducer
Types overview

$T_{AMB} = 25^{\circ}\text{C}$

$V_{CC} = 5\text{ V, unless otherwise noted}$

Pressure range	50 mbar (0.8 psi)	100 mbar (1.5 psi)
ID group	HPSA 1000-050M	HPSA 1000-100M
V_{OUT}	30 to 130 mV	30 to 130 mV
V_{OFS(MAX)}	-100 mV +40 mV	-100 mV +40 mV
Temp. ranges	Operating: -25 to 85°C Storage : -40 to 125°C	
Over pressure	500 mbar	1 bar
Burst pressure	750 mbar	1.5 bar

Pressure range	350 mbar (5 psi)	1 bar (15 psi)	2 bar (30 psi)	4 bar (60 psi)	7 bar (100 psi)
ID group	HPSA 1000-350M	HPSA 1000-001B	HPSA 1000-002B	HPSA 1000-004B	HPSA 1000-007B
V_{OUT}	75 to 200 mV	100 to 200 mV	100 to 200 mV	100 to 200 mV	100 to 200 mV
V_{OFS(MAX)}	±50 mV	±50 mV	±50 mV	±50 mV	±50 mV
Temp. range	Operating: -25 to 85°C Storage: -40 to 125°C				
Over pressure ¹⁾	1 bar	3 bar	6 bar	8 bar	14 bar
Burst pressure ²⁾	1.7 bar	5 bar	10 bar	12 bar	21 bar

Performance characteristics

$T_{AMB} = 25^{\circ}\text{C}$

$V_{CC} = 5\text{ V, unless otherwise noted}$

Parameter	Min.	Type	Max.	Unit
Excitation current		1	3	mA
Excitation voltage		5	10	V
Bridge resistance	2		6	kΩ
TC Span (0 to 70°C)		-0.20		%FS/°C
TC Offset (0 to 70°C)		-0.01		%FS/°C
TC Resistance (0 to 70°C)		0.27		%FS/°C
Pressure hysteresis & nonlinearity		0.2	0.5	%FS
Media compatibility	See spec. note ⁶⁾			


This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Hyb d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing. Copyright © Hyb d.o.o., 2010. All rights reserved.

HPSA 1000 Pressure Transducer

Specification notes

- 1) Over pressure is the maximum pressure which may be applied without causing damage to the sensing element.
- 2) Burst pressure is the maximum pressure which may be applied without causing leakage damage to the sensing element.
- 3) Analog output signal is ratiometric to power supply V_{cc} .
- 4) Offset voltage is the voltage output at zero pressure.
- 5) Nonlinearity is defined as the BFSL (best fit straight line) across entire pressure range.
- 6) All noncorrosive gases to silicon, RTV, gold, ceramics Al_2O_3 , polymer.

Outline dimensions and pinout

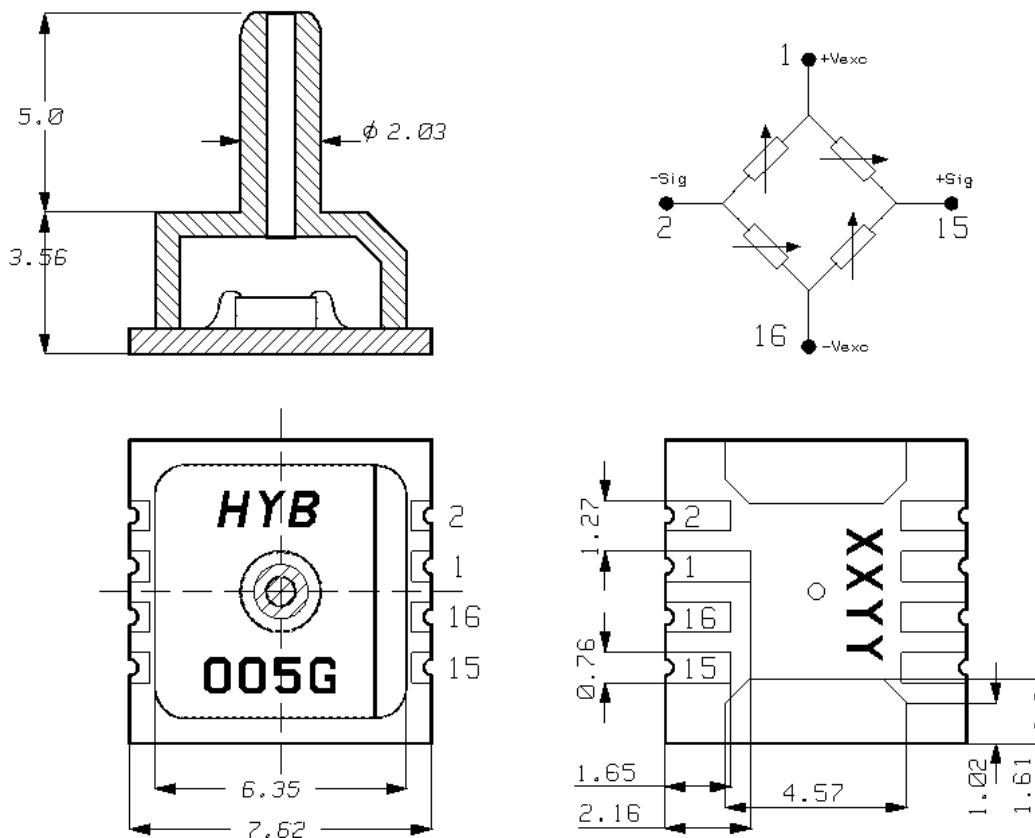

Note: Output polarity is defined for positive pressure on pressure port.

This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Hyb d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing. Copyright © Hyb d.o.o., 2010. All rights reserved.

HPSA 1000 Pressure Transducer

Ordering guide

Transducer type	Pressure range	Pressure type	Port type
HPSA 1000	050M	A	T
	100M	G	H
	350M		
	001B		
	002B		
	004B		
	007B		

Pressure range	
050M	50 mbar
100M	100 mbar
350M	350 mbar
001B	1 bar
002B	2 bar
004B	4 bar
007B	7 bar

Pressure type	
A	Absolute (for p≥1 bar)
G	Gage

Port type	
T	Tube
H	Hole (without pressure tube)

Other configurations possible on special request.

This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Hyb d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing. Copyright © Hyb d.o.o., 2010. All rights reserved.